

ACA-BL10-100

LHD Cable Accessory - Bracket "L", 100mm (3.9") (Zintec) w/ Sleeve - Qty 100


L-Bracket

The ACA-BL series L-brackets is designed to support linear heat cable above the risk area e.g. the top run of a cable tray. A silicon protection sleeve is supplied with the unit to protect the sensor cable when fastened to the bracket.

Installation

The ACA-BL may be fitted to the cable tray and secured in place using a suitable bolt and nut at one end. The hole at the other end of the bracket allows for the securing of the sensor cable using a silicone sleeve and cable tie. The L-bracket allows support for the sensor cable at the selected distance away from the detection area.

Recommended spacing: 1m

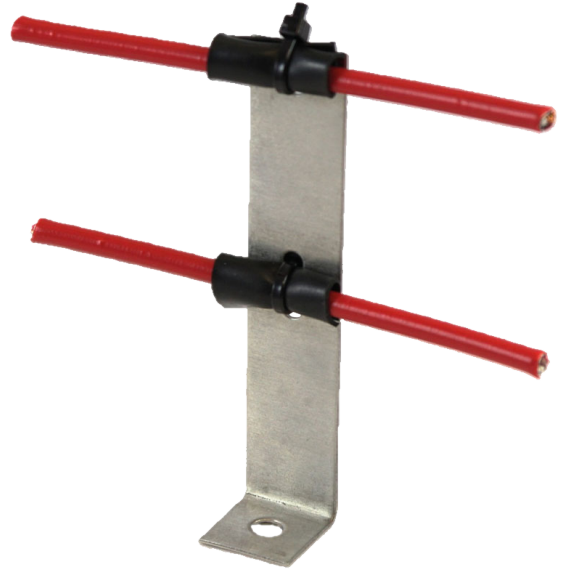

Details

- Easy installation of linear heat cable
- For use on cable trays
- Available in zintec
- Available in quantities of 100

ACA-BL10-100

LHD Cable Accessory - Bracket "L", 100mm (3.9") (Zintec) w/ Sleeve - Qty 100

Technical specifications

Physical

Physical dimensions	20 x 100 mm (W x L)
Net weight	2.6 kg
Mounting type	Surface mount
Material (body)	Stainless steel, Zintec (zinc-coated steel)

Environmental

Environment	Indoor, Outdoor
-------------	-----------------



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 7 September 2023 - 16:21