


Performance

	CAS380	CASBB394
Sound output		
Low volume	84dB at < 4mA	77dB at < 6.6mA
Medium volume	92dB at < 8mA	89dB at < 8mA
High volume	95dB at < 12mA	90dB at < 9mA
Flash rate		
	n/a	0.5 Hz flash*

*Polar dispersion information available on datasheet

Dimensions

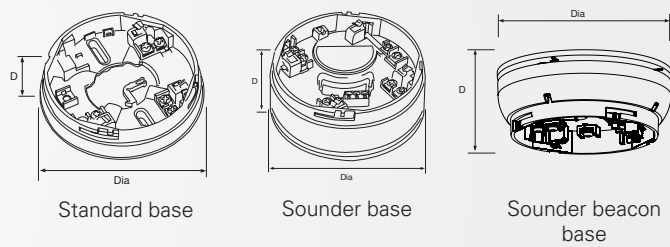

Description	Diameter (mm)	Depth (mm)
Standard base	104	22
Sounder base	102	40
Sounder beacon base	115	44

Catalogue numbers

Description	Code
Standard base	CAB300
Sounder base	CAS380
VAD sounder beacon base	CASBB394
Sounder beacon base	CASBB384
Cover plate (pack of 5)	CASC
Bell tone sounder base	CAS380B
Australian sounder base*	CAS380AU*
Addressable relay base	MAB800R
Base shroud	BAR3000

* Only for Australian market

